



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 13 MAR 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02075326.5

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02075326.5
Demande no:

Anmeldetag:
Date of filing: 25.01.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Technische Universiteit Delft
Julianalaan 134
2628 BL Delft
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Heat integrated distillation column

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B01D3/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

25. 01. 2002

Title: Heat integrated distillation column

(38)

The invention relates to a heat integrated distillation column having separate volumes inside the column, which is especially suitable for distillation operations in the process industry. More in particular the invention relates to such a column, wherein the said volumes can be
5 operated at different pressures with improved heat exchange, thereby providing energy advantages in the operation.

It is well recognised that heat integration in distillation columns is an important means for providing improvements in energy efficiency in the operation of distillation. However, the application of this technology has
10 been impeded by factors of cost of construction and the difficulty of providing adequate heat exchange, especially without complicated construction of the column(s).

US-A 4,681,661 is directed to a heat integrated distillation column, which column comprises a central column, and an outer, annular
15 column around the central column. Thereby different regions are provided in the column, which regions can be operated at different pressures. Both regions are provided with conventional trays and downcomers.

In US-A 5,783,047 a heat integrated distillation column has been described, which column comprises an outer shell and inside one or more
20 tubes. Thereby different regions are provided in the column, which regions can be operated at different pressures. However, in order to provide sufficient heat exchange area between the two regions in industrial large scale operations, several tubes of relatively small diameter have to be placed in the outer shell. Due to the relatively small diameter of the tubes, the use
25 of distillation internals inside the tubes is limited to irregular packing rings or structured packing. The use of trays requires a complicated construction.

It is an object of the present invention to provide a heat integrated distillation column, consisting of two separated volumes along

the length of the column, wherein sufficient heat transfer is provided between the volumes. It is also an object of the invention to provide for a heat integrated distillation column of this type, wherein distillation trays can be used.

5 This object and other objects are provided for by the column of the invention. This column is a heat integrated distillation column comprising a cylindrical shell having an upper and a lower end and at least one first inner volume and at least one second inner volume in the shell, said volumes reaching from said upper end to said lower end, and being in heat
10 exchanging contact with each other through a wall separating the volumes, the improvement comprising providing means having heat exchanging capacity extending through the said wall from said at least one first volume into said at least one second volume, whereby the inside of the said heat
15 exchanging means is in open connection with the said first volume.

15 The important aspect of the column of the present invention resides in the presence of means for providing heat exchange, which means extend into the other volume, thereby providing for the possibility of condensing vapour inside the said means, thus providing for heat transfer to the other volume.

20 In the heat integrated distillation column of the invention, in both of the volumes, vapour which enters from the lower end and goes out of the upper end comes in contact with liquid which enters from the upper end and flows to the lower end, on the surface of the packing or on the trays. At this time, the mass transfer occurs, and hence the distillation operation is
25 performed. In the heat integrated distillation column of the invention, two distillation sections, i.e., a higher-pressure section and a lower-pressure section are disposed in one column.

30 The heat integrated distillation column of the invention has a construction in which the enriching (rectification) section (E) (portion above the feed stage) and the stripping section (S) (portion below the feed stage) in

the conventional distillation column are separated from each other and disposed in parallel, and the operating pressure of the enriching section is made higher than that of the stripping section so that the operating temperature of the enriching section becomes higher than that of the stripping section. In this configuration, if there exists a heat transfer surface between them, heat transfer occurs from the enriching section to the stripping section. In the heat integrated distillation column of the invention the heat transfer occurs from the enriching section to the stripping section.

In contrast to the conventional distillation column in which the heat input is provided by a reboiler, according to the heat integrated distillation column of the invention, the heat input is mainly provided in the whole of the stripping section, with the result that the heat load on the reboiler can be minimised. In the conventional distillation column, the heat removal is performed by a condenser disposed at the top of the column. In contrast, according to the heat integrated distillation column of the invention, the heat removal is performed in the whole of the enriching section with the result that the condenser duty can be minimised. Accordingly, it is possible to save a considerable amount of energy, compared with conventional distillation columns.

In a heat integrated distillation column, vapour is condensed in the enriching section, and hence the flow rate of the vapour is decreased toward the upper portion and liquid is vapourized in the stripping section, so that the flow rate of the vapour is increased toward the upper portion. Therefore, in order to ensure that the ratio of the volume flow rate of the ascending vapour and the column cross-sectional area is kept within the operating range of column internals irrespective of the height of the column, the column cross-sectional area should be decreased when moving from the bottom to the top of the enriching section, and increased when moving from the bottom to the top of the stripping section. This aspect of a preferred

embodiment of the invention has been shown in the figures, which will be discussed below.

The column of the invention may be constructed in various ways, provided the two volumes are always adjacent to each other, divided by a separating wall. In practice this means that two possibilities are preferred. The first possibility is a column, having a concentric inner column. The other possibility is a column provided with a dividing wall that reaches from one side of the column to the other side.

The column of invention contains means for improving vapour/liquid contact, which means can for example be trays, which is preferred, but also random or structured packings. It is not necessary to have the same system of said means for improving vapour/liquid contact in both volumes.

As indicated above, preference is given to the use of trays with downcomers, as these provide an easy and uncomplicated way of providing vapour/liquid contact. In this embodiment the means for heat exchange, preferably vertical heat transfer panels, are provided in the downcomer, and the liquid that flows down is distributed over the surface of the panels by means of liquid distribution systems.

The means having heat exchanging capacity can have the form of plates or a tubular construction. Inside the heat exchange means the vapour condenses. The surface of the plates can be smooth or textured. In general it is possible to use coils, flat plates, dimple plates, finned plates, corrugated plates or other plates that enhance heat transfer.

The heat exchange means extend through the wall from the first volume into second volume, whereby the inside of the said heat exchanging means is in open connection with the said first volume. Vapour enters the means and condenses inside. The heat is transferred through the walls into the second volume, and the condensate flows back into the first volume.

The present invention is especially suitable for use in energy intensive distillation operations. Examples thereof are liquid air distillation and the various separations in the petrochemical industry, such as ethane/ethylene separation, propane/propylene separation,
5 butane/isobutane separation and the like.

An important aspect in the invention is the difference in operating pressure between the two volumes. In order to obtain such difference means have to be present to increase the pressure of the vapour stream going from one volume to the other volume (such as a blower or a compressor). The
10 pressure in the enriching (or rectification) section will be higher than the pressure in the stripping section. In general the ratio of the pressures will not be much higher than that required theoretically to obtain sufficient amount of vaporisation of the liquid in the stripping section. In general this ratio will not exceed 2.

15 The invention will now be elucidated on the basis of a number of figures, wherein preferred embodiments of the invention will be described. These figures are not intended as limiting the scope of the invention.

Description of Figures

20

Figure 1 shows a top view of a tray in a concentric column according to the invention, which column has been fitted with trays and downcomers,

Figure 2 shows a vertical cross-section of the column depicted in
25 Figure 1, along the line A-A,

Figure 3 shows a top view of a tray below that depicted in Figure 1,

Figure 4 shows a vertical cross-section along the line B-B in Fig 3,

30 Figure 5 shows a possible configuration of the liquid distribution system in a three-dimensional drawing,

Figures 6 a-b-c-d show a possible assembly of heat transfer panels,

Figure 7 shows a top view of a column of the invention based on a flat wall dividing the column into two volumes,

5 Figure 8 shows a cross section of the divided wall column, and

Figures 9 and 10 show the feature that the ratio of the cross sectional areas of stripping and enriching sections varies with the amount of vapour along the height of the column.

10 Detailed description of Figures

Figure 1 shows a top view of a tray and Figure 2 a vertical cross section of a part of the column according to the invention. The cross section shows 4 trays (a, b, c, d) in the inner column and 4 trays in the
15 annular outer column. The top view refers to tray (a) as indicated in the cross section. The trays can be either sieve trays or any other type used in industrial distillation such as valve trays, hubble cap trays, or tunnel trays. The dashed lines on the top view drawing show the downcomers positioned above the tray.

20 Tray (a) of the inner column is of ordinary cross flow design and provided with rectangular downcomer pipes. The arrows indicate the direction of the liquid flowing over the tray. The liquid exiting the downcomers from the tray above enters tray (a) on the right-hand side, flows over the tray and is then collected in the downcomers on the left-hand
25 side.

In this example the trays in the outer annular column are provided with four downcomers in which the heat transfer panels are mounted. The liquid exiting a downcomer from the tray located above tray (a) splits up at the outlet into two equal portions each entering the active
30 area of tray (a). The arrows indicate the direction of the liquid flow over the

tray. At the end of the active area section the liquid is collected in main troughs which are positioned above the downcomers. These troughs are provided with side channels that enable the distribution of the liquid over the heat transfer panels.

5 The cross section drawing at location A-A shows the position of the trays and the heat transfer panels. The top of the heat transfer panels is connected via one or more tubes to the vapour space of the inner column. At the bottom the heat transfer panels are provided with a tube for drainage of the condensate to the tray of the inner column.

10 Figure 3 shows a top view of tray (b) that is located direct below tray (a) and Figure 4 the cross section B-B. The position of the downcomers in the outer column has been rotated over an angle of 45° with respect to the tray above. In case the trays of the annular column are provided with 2 downcomers this rotation angle will be 90° and in case of 6
15 downcomers 30° .

 Figure 5 shows a three-dimensional drawing of a possible configuration of the liquid distribution system placed above the heat transfer panels in the downcomers of the stripping section. The liquid flows via the main troughs into the side channels. In the walls of the side
20 channels holes are provided to distribute the liquid over the heat transfer panels. At the outside of channel walls the holes are covered with splash plates to ensure a film flow of liquid over the heat transfer panels. For this reason the splash plates extend over the top of the heat transfer panels. At the end of the channels weirs are provided to maintain a constant liquid
25 level. Excessive liquid is discharged over these weirs.

 In Figures 6 a-b-c-d a possible assembly of heat transfer panels is shown. In this example the assembly consists of 6 parallel panels. The panels are preferably constructed of corrugated sheets oriented in vertical direction. Other constructions like coils, flat plates, dimple plates, finned
30 plates or other plates that enhance heat transfer are possible too. The

Figure 6d shows that by the corrugations vertical channels are obtained. At the top these channels are connected to a vapour entrance channel. The six vapour inlet channels are connected to a header with two vapour inlets. In a similar way the condensate is drained into the inner column at the bottom of the panels via liquid outlet channels connected to a liquid collection header.

Figure 7 shows a top view and Figure 8 shows a cross section of a column of the invention based on a wall dividing the two volumes. In these figures the same features are shown as in the Figures 1-4.

Figures 9-10 show the feature that ratio of the cross sectional areas of stripping and enriching sections varies with the amount of vapour along the height of the column. This has been shown for two possible constructions. In Figure 9 a divided wall column is shown. The cross sectional area of both enriching and stripping section is changed stepwise. Figure 10 shows the stepwise cross sectional area variation for a concentric column.

Example

A column in accordance with the construction of Figures 1-5, having panels in the downcomers and the constructional details in Table 1 is used for distillation of the system propane/propylene. The overall heat transfer coefficient is $700 \text{ W/m}^2\text{K}$ and the heat transfer area per tray is 10.5 m^2 .

Table 1

Diameter outer column	2.5 m
Diameter inner column	1.2 m
Tray spacing	0.5 m

Length heat exchange panels	0.55 m
Height panels	0.4 m
A/ panel	0.44 m ²
Number of panels per tray	24
Number of panels per downcomer	6

For the same type of column as above, but using tubes as heat exchange device, the corresponding dimensions are as follows.

10

Table 2

Length tubes (hairpins)	0.5 m
Diameter tubes (external)	20 mm
Pitch (rectangular)	30 mm
Tubes per downcomer	84

15

Claims

(38)

1. Heat integrated distillation column comprising a cylindrical outer shell having an upper and a lower end and at least one first inner
5 volume and at least one second inner volume in the shell, said volumes reaching from said upper end to said lower end, and being in heat exchanging contact with each other through a wall separating the volumes, the improvement comprising providing means having heat
10 exchanging capacity extending through the said wall from said at least one first volume into said at least one second volume, whereby the inside of the said heat exchanging means is in open connection with the said first volume.

2. Column according to claim 1, wherein the said column is provided with an inner tube which is concentric with the outer shell, thereby
15 defining a volume inside the inner tube and an annular volume between inner tube and outer shell.

3. Column according to claim 1, wherein the said first and said second volume have been created by a separating wall extending along
20 the inside of the outer shell, and connected at both ends to the outer wall.

4. Column according to claim 1-3, wherein said first volume is constructed to act as stripping section and said second volume as
enriching section.

5. Column according to claim 1-4, wherein the both volumes are
25 provided with trays and downcomers.

6. Column according to claim 1-4, wherein the enriching section is provided with trays and downcomers and the stripping section is provided with structured or random packing.

7. Column according to claim 1-4, wherein both the stripping section and the enriching section have been provided with a structured and/or a random packing.

5 8. Column according to any one of the claims 1-7, wherein the said heat exchange means comprise a panel or a tubular construction, preferably corrugated sheets oriented in vertical direction, coils, flat plates, dimple plates, finned plates or other plates that enhance heat transfer.

10 9. Column according to claim 1-8, wherein a plurality of said means having heat exchanging capacity is present along the length of the column.

10. Column according to claim 5 or 6, wherein the said means having heat exchanging capacity are located in the downcomer of a tray.

15 11. Column according to claim 1-10, wherein the volume of one section increases from the lower end to the upper end and the volume of the other section simultaneously decreases from the lower end to the upper end.

20 12. Column according to claim 1-11, wherein means are present for providing a pressure difference between the said first volume and the said second volume.

13. Process for distilling liquefied air or petrochemical fractions, said process comprising applying a column according to claim 1-12.

14. Use of a column according to claim 1-12, for distillation.

Title: Heat integrated distillation column


EPO - DG 1
25. 01. 2002

Abstract

(38)

The invention is directed to a heat integrated distillation column comprising a cylindrical shell having an upper and a lower end and at least one first inner volume and at least one second inner volume in the shell, said volumes reaching from said upper end to said lower end, and being in heat exchanging contact with each other through a wall separating the volumes, the improvement comprising providing means having heat exchanging capacity extending through the said wall from said at least one first volume into said at least one second volume, whereby the inside of the said heat exchanging means is in open connection with the said first volume.

Top view tray a

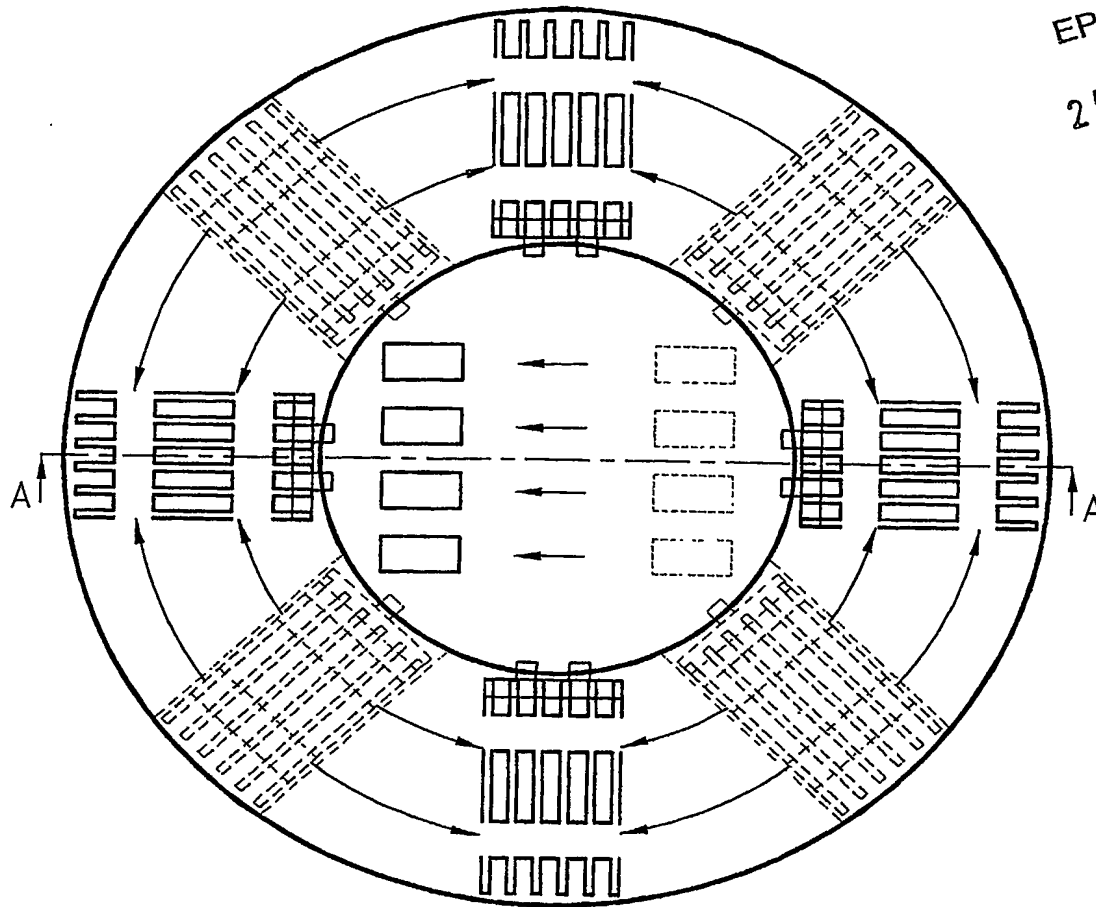


EPO - DG 1
25. 01. 2002

(38)

Fig 1

Cross section over A-A

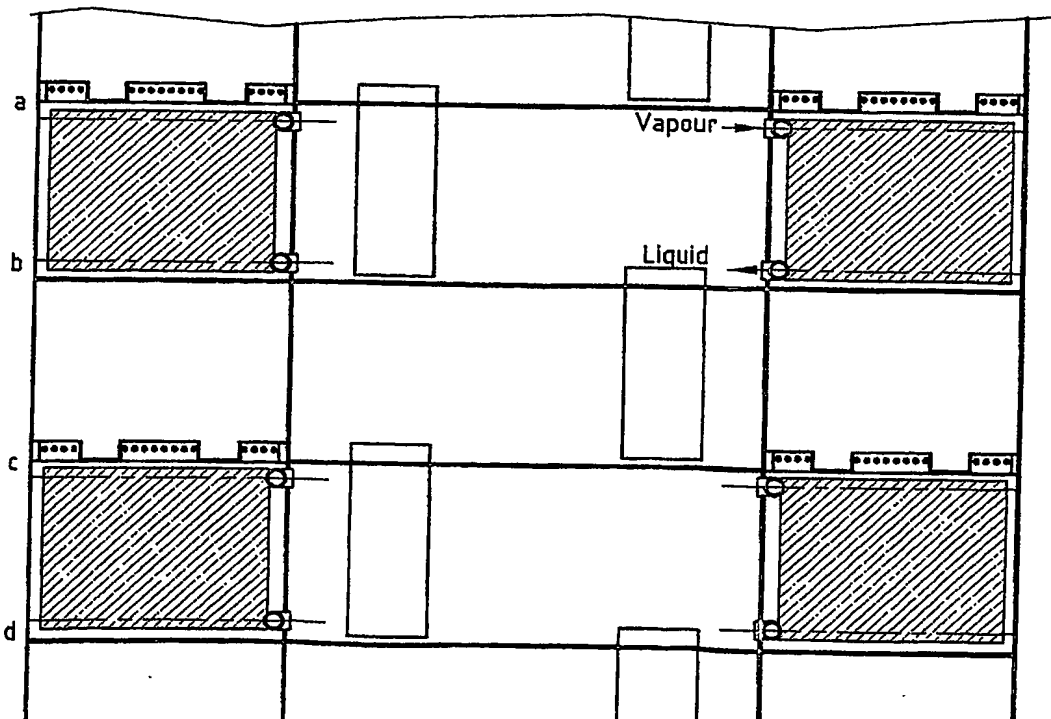

Top view tray b

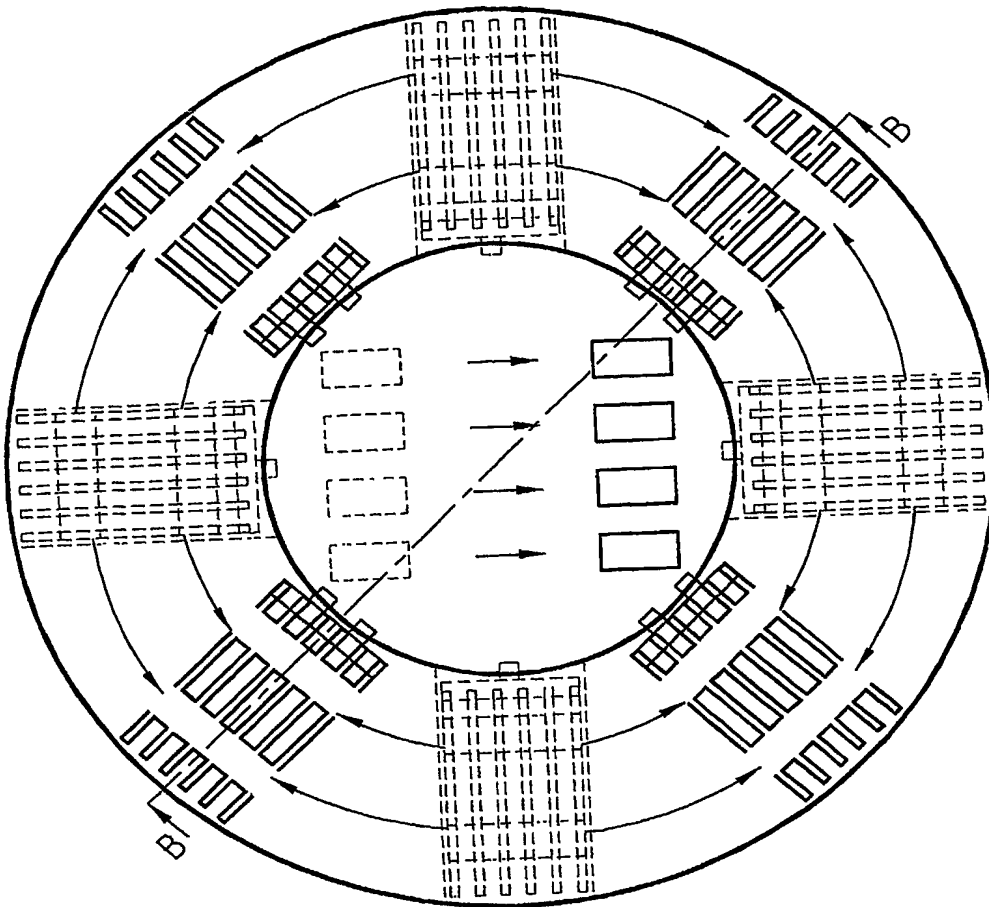


Fig 3

Cross section over B-B


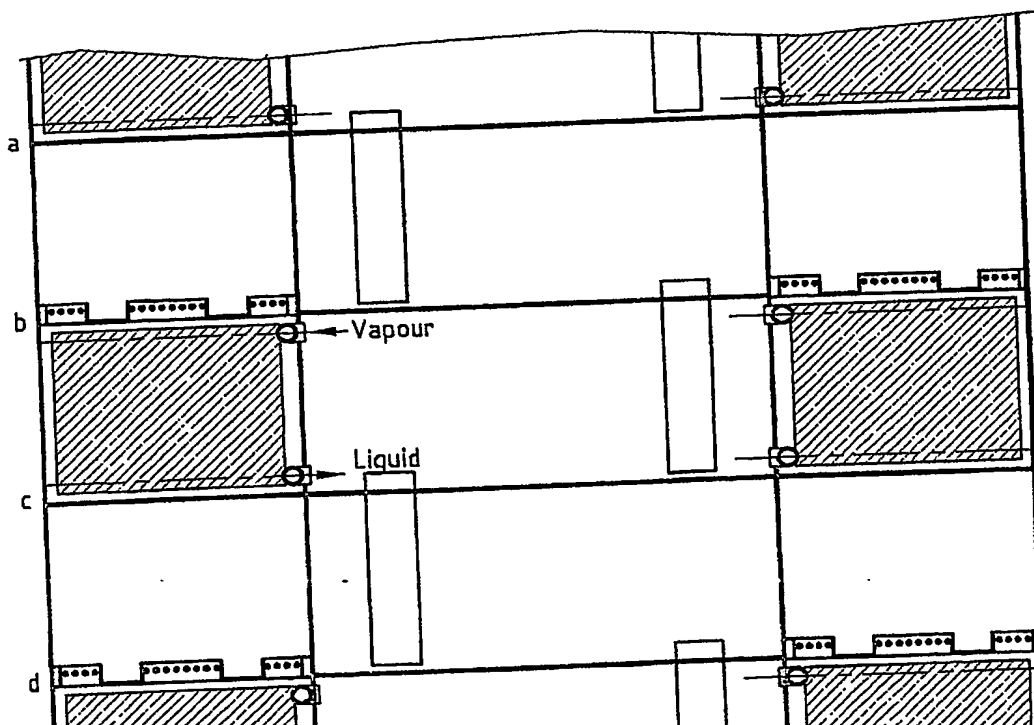


Fig 4


Top View




Side View

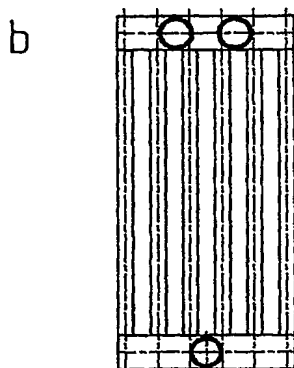

Front View

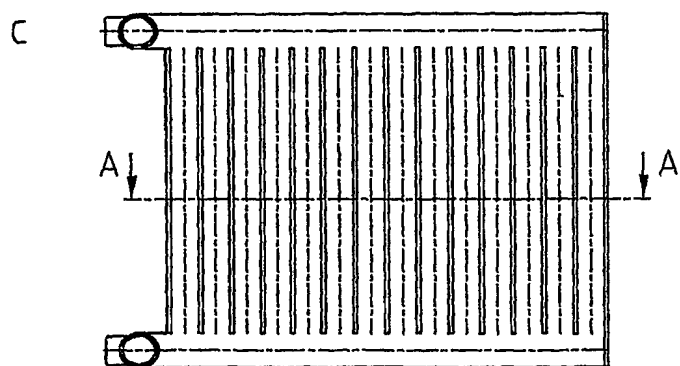

Cross Section A-A

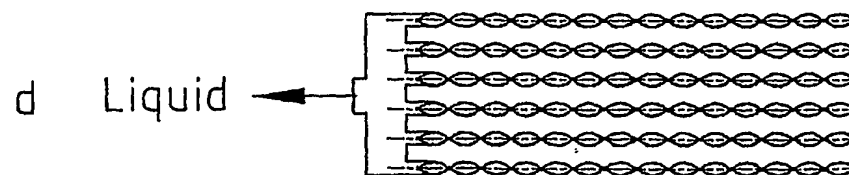

Top View




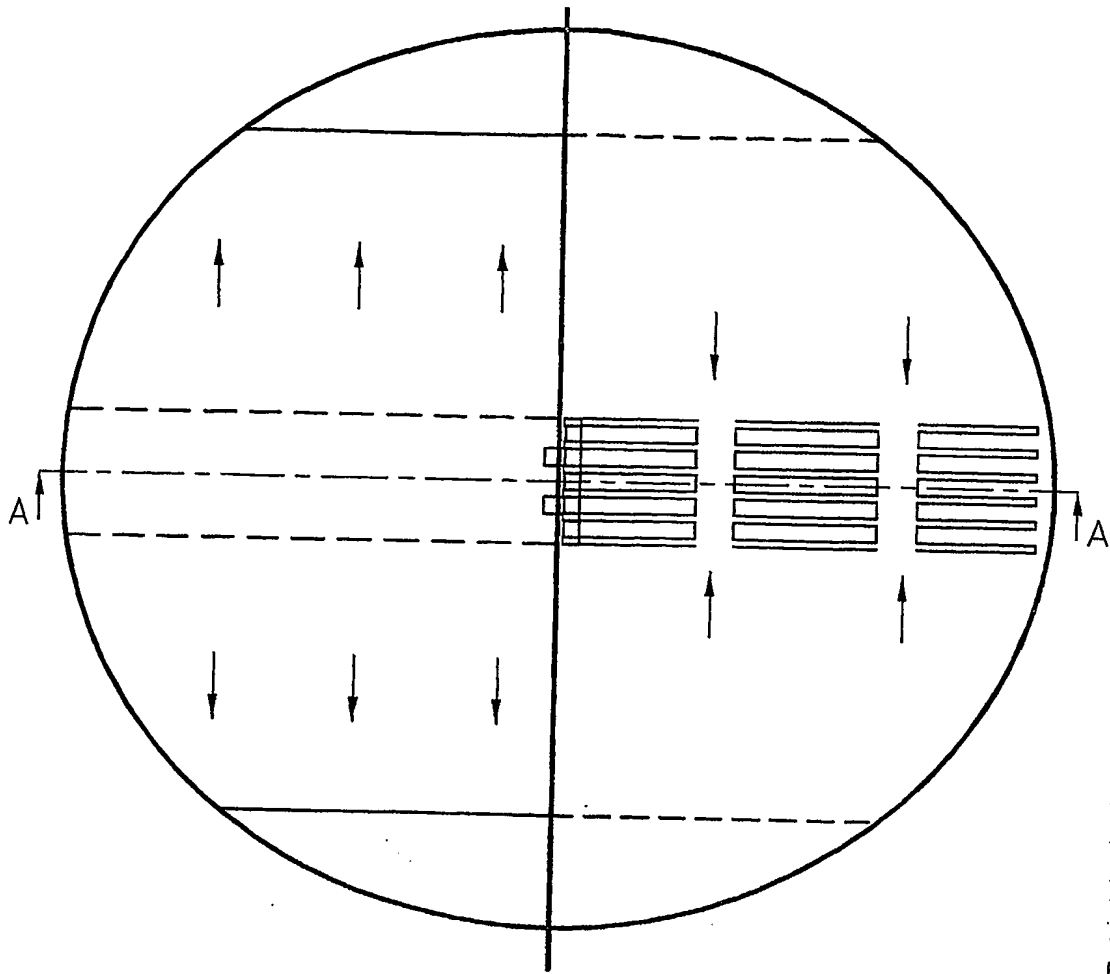


Fig 7

Cross Section A-A

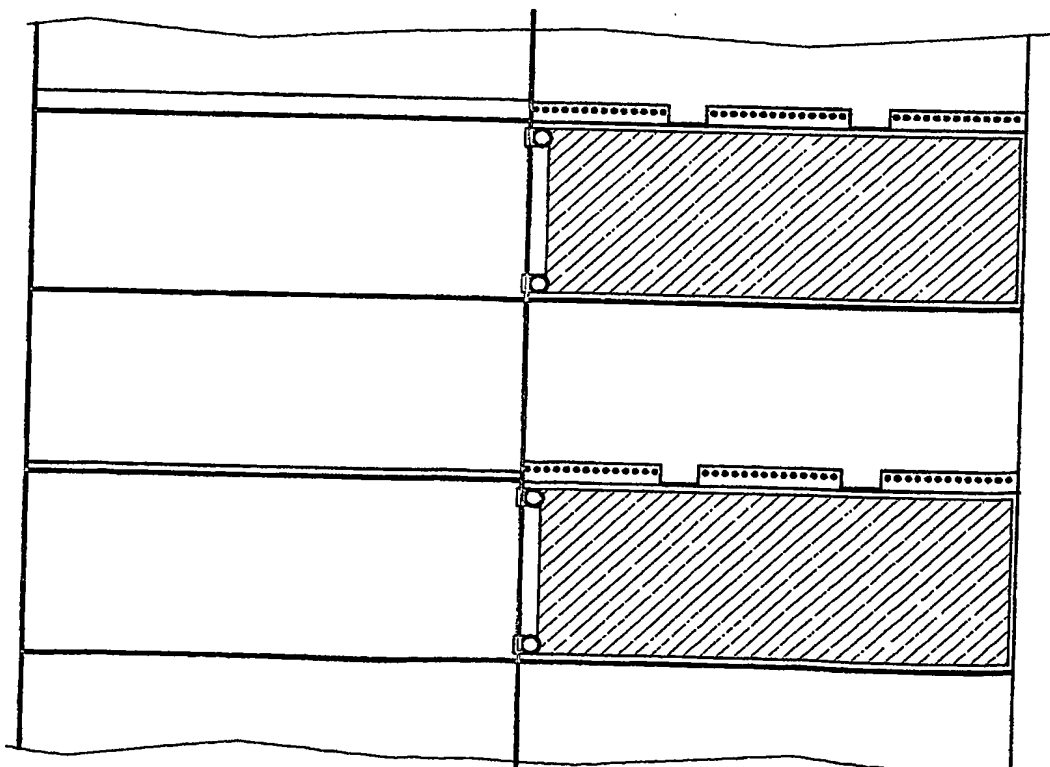

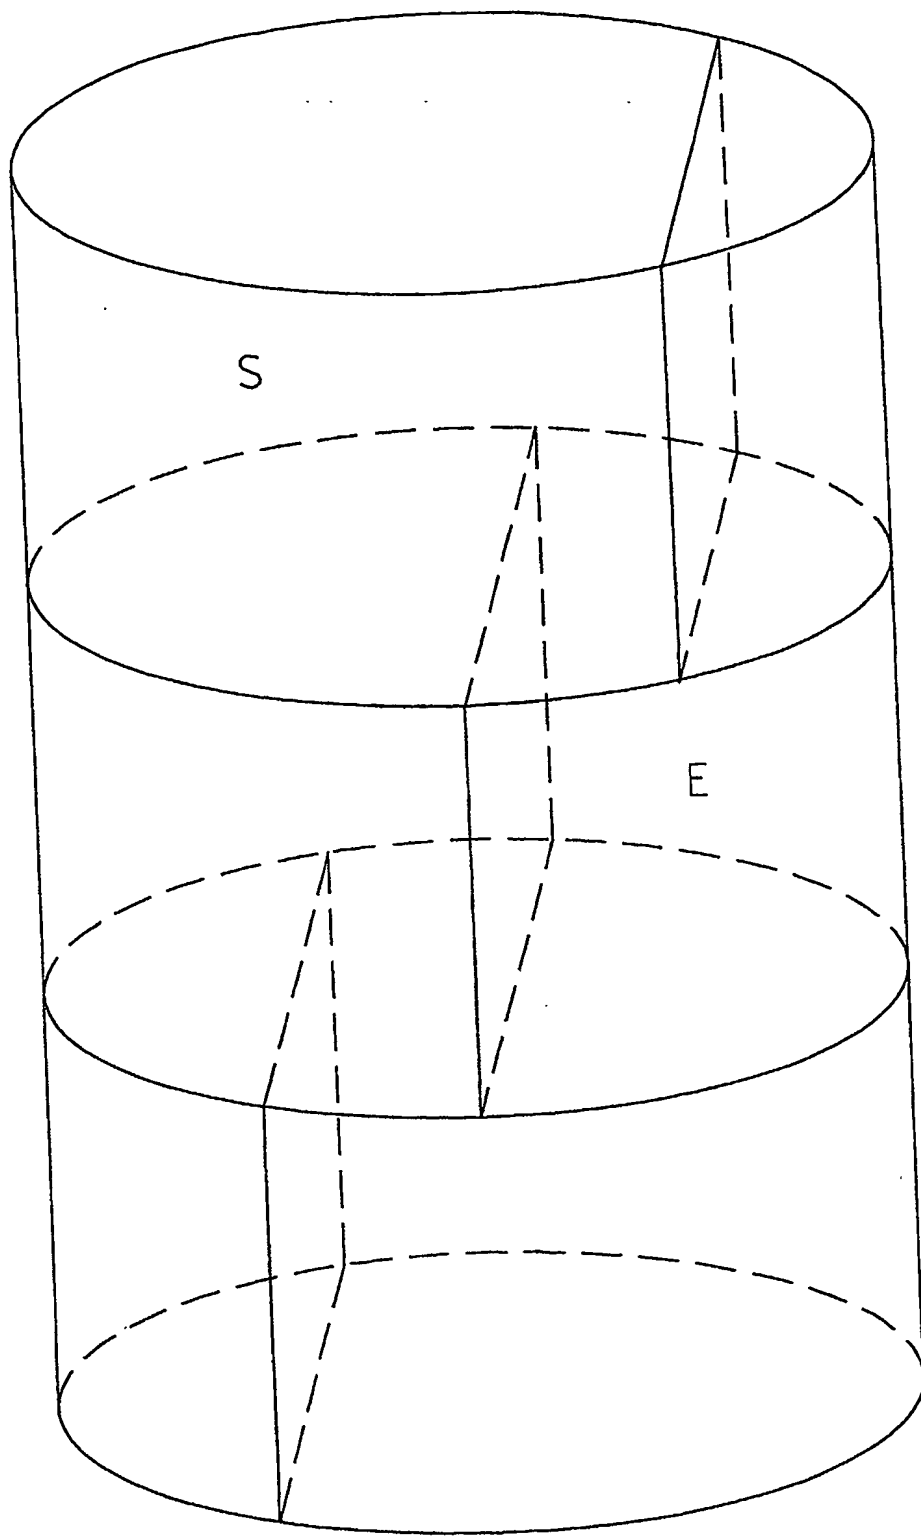

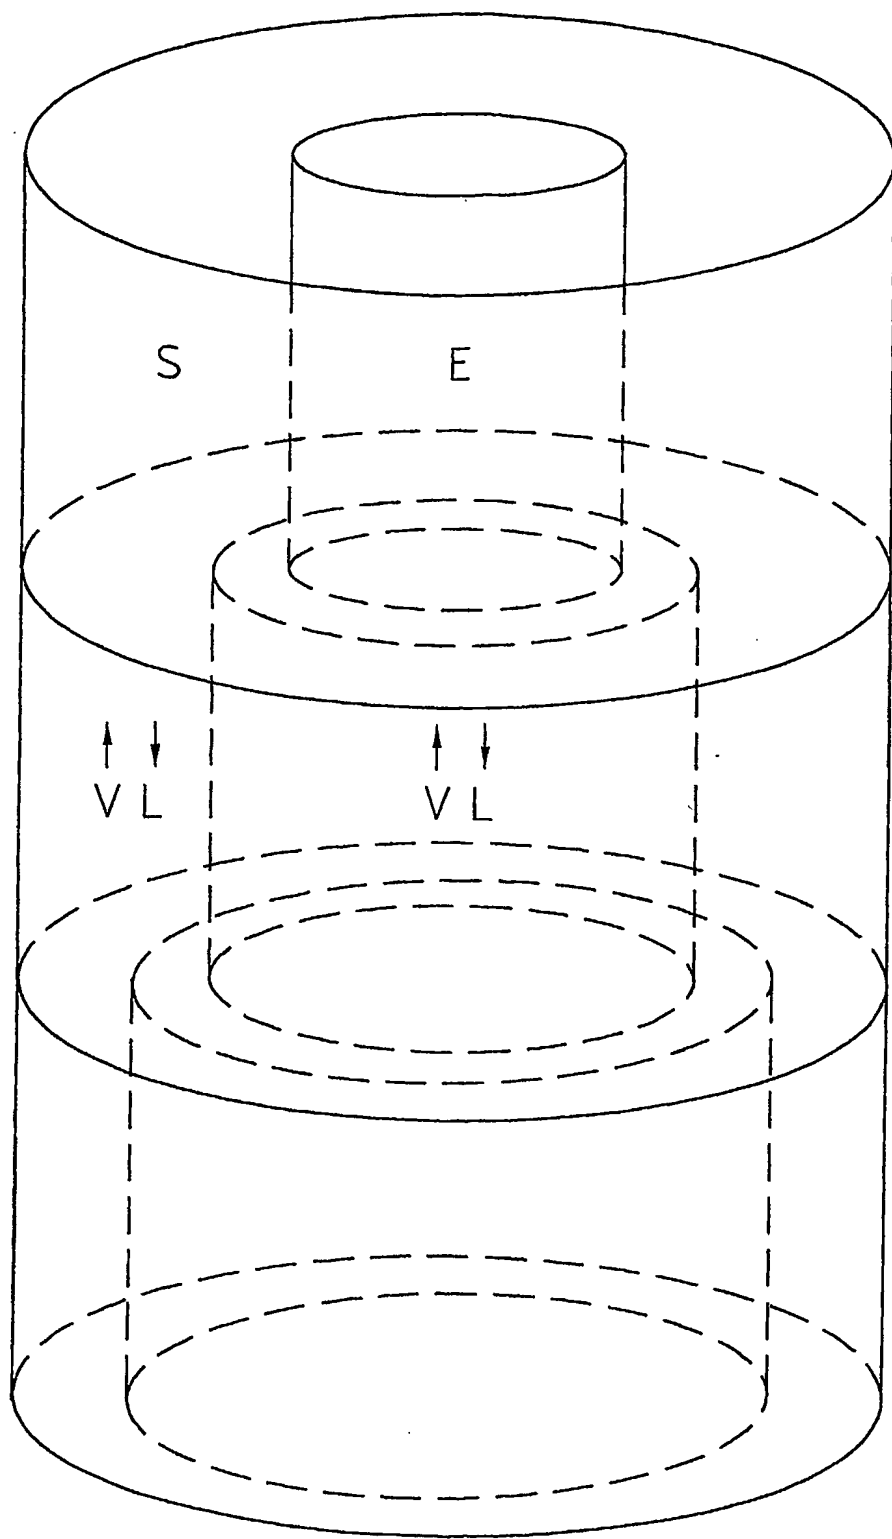

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.